


# DP Alert

This system is used to warn dive controllers, when there is a problem with the vessels Dynamic Positioning system, so that appropriate action can be taken to ensure the divers safety.

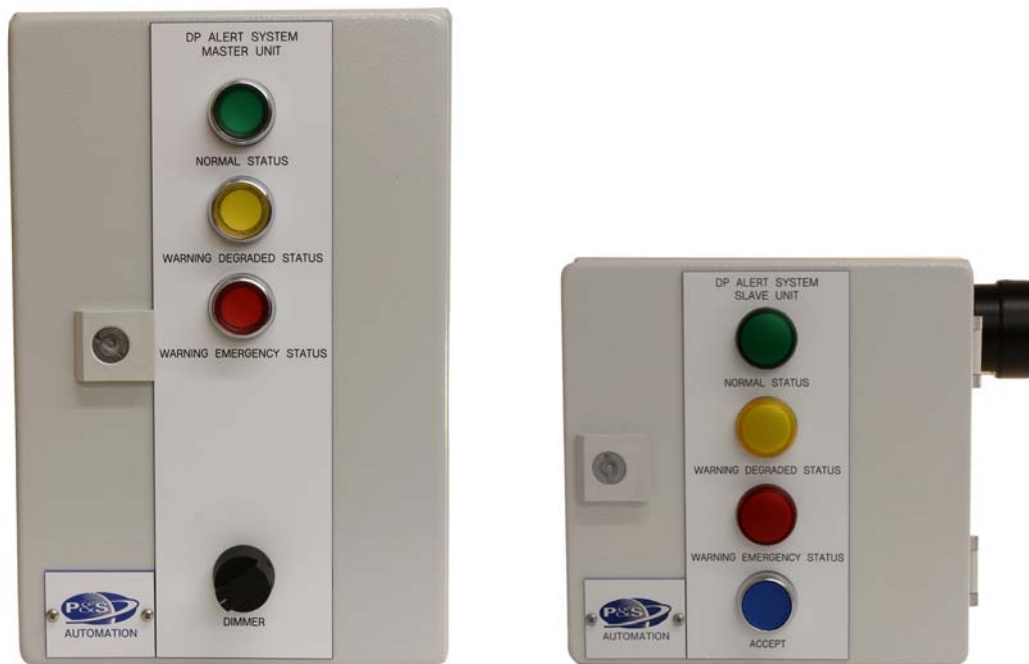

## Features

- 230/115 V 50/60Hz and 24Vdc Versions available.
- Slave unit quantities as required.
- Small compact enclosures.
- Lamps are LED's to give long life and low maintenance.
- Master unit lamps are dimmable for Wheelhouse installation.
- Built to customer requirements.



P and S Automation Ltd  
Unit 47-49  
Cutlers Road,  
Saltcoats Industrial Estate, South Woodham Ferrers,  
Essex  
CM3 5WA

enquiries@pandsautomation.com  
+44 (0)1245 322777

# DP Alert System Specification

## Power Requirements

24Vdc (20 to 29Vdc), 110 to 240V ac 50/60 Hz – to be confirmed with order

Consumption – Master Unit 40VA approx., Slave Unit 25VA approx.

## Actuation

The status can be manually set by push button on the Master unit, alternatively 3 volt free contacts can be used to set the status to be confirmed with order

## Dimensions

The standard units are bulkhead mounted, the Master unit being 200mm x 300mm x 150mm (w x h x d), the slave units are 200mm x 200mm x 120mm.

Panel mount versions are available.

## Status Indication

Normal – Green LED illuminated

Degraded – Yellow LED flashing and sounder 80db@1m, then steady yellow LED when accepted.

Emergency – Red LED flashing and sounder 80db@1m, then steady red LED when accepted

Louder sounders are available if required.



P and S Automation Ltd  
Unit 47-49  
Cutlers Road,  
Saltcoats Industrial Estate, South Woodham Ferrers,  
Essex  
CM3 5WA

enquiries@pandsautomation.com  
+44 (0)1245 322777